

FAQ


Grinder

[Aluminum Alloy Coffee Mill PRISM_MSA-2-SV/B]

Q. How do I assemble the Aluminum Alloy Coffee Mill PRISM (MSA-2-B/SV)?

A. Follow the assembly instructions below.


(1) Assemble the parts in the correct order.

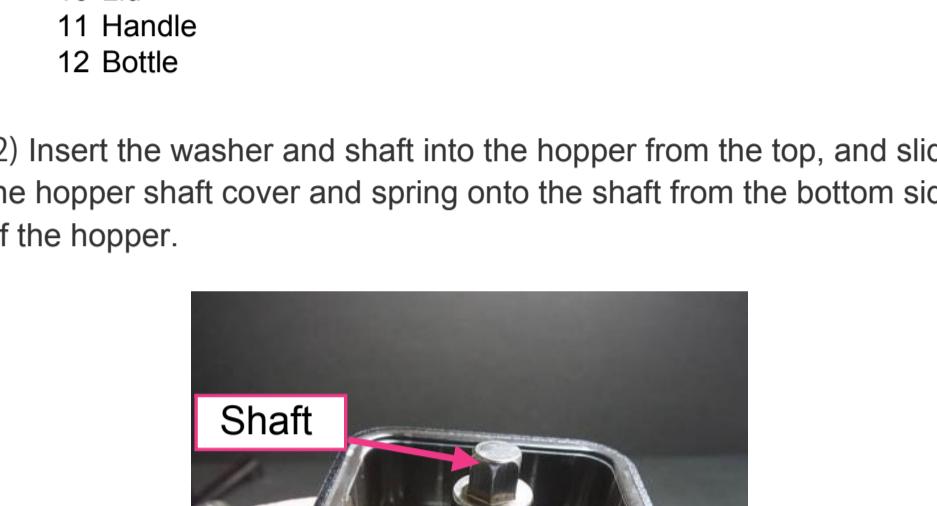

In order from the right hand side,

- 1 Hopper
- 2 Washer
- 3 Shaft
- 4 Hopper Shaft Cover
- 5 Spring
- 6 Outer Burr
- 7 Setting Pin
- 8 Inner Burr
- 9 Grind Adjustment Knob
- 10 Lid
- 11 Handle
- 12 Bottle

(2) Insert the washer and shaft into the hopper from the top, and slide the hopper shaft cover and spring onto the shaft from the bottom side of the hopper.

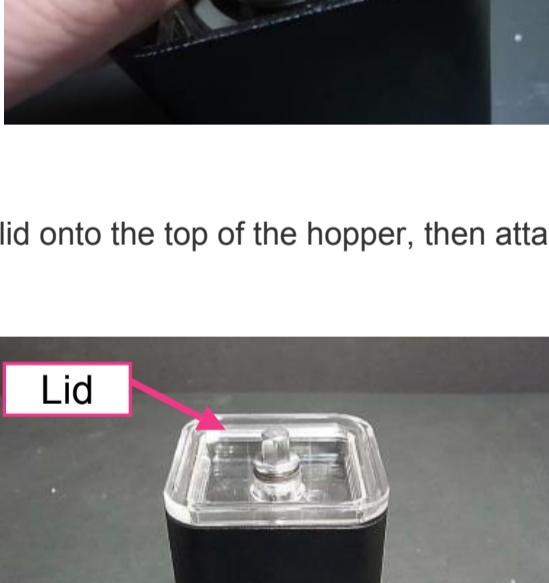

(3) Attach the fixing pin onto the inner burr, attach the inner burr (with the fixing pin in place) to the hopper from below. Finish by attaching the ground size adjustment knob.



(4) Attach the lid onto the top of the hopper, then attach the handle on the shaft.



(5) Finish by placing the bottle on the assembled hopper.

[back to the list](#) >>